



STAINLESS STEEL CABLE TIES

Stainless Steel Roller Ball Lock Ties


These are self - locking stainless steel cable ties which are designed for a strong, durable corrosion resistant bundling of cables.

The locking mechanism in roller ball lock self - locking ties is by using a stainless steel hardened ball in a precision formed housing.

- Loop tensile strength available up to 2040 N (459 lbs)
- Sizes from 4.6 mm to 15.0 mm wide in various lengths are available
- Available in Non Corrosive, Non magnetic SS 304 and in SS 316 Grades
- Polyester Coated Ties available
- Uncoated Ties Temperature range (-)80°C to 538° C and Coated Ties Temperature range (-)40°C to 150°C (Polyester)
- Polyester Coating is Halogen Free, Low Smoke, Non-toxic, Flame Retardant and UV Resistant

Applications : Cable bundling to cable ways, Bundling of Cables together, Tying identification tags to cables / hoses, Light duty clamping etc...

Application suggestion : Always use a proper Tool for tensioning and cutting the Ball Lock Ties. Avoid Ball Lock Ties in heavy vibrations area. (Use Multi Lock Ties / Releasable ties in areas of heavy vibration)



Application of Roller Ball Lock Ties



ROLLER BALL LOCK TIES

**Stainless Steel Grade 304,
Uncoated**

Temperature range : (-) 80°C to 538°C
Flammability : Fire Proof
Features : UV Resistant, Weather Proof,
Indoor / Outdoor use



B-Tec Part Code	Type	Width mm	Length mm	Thickness mm	Max Bundle Dia mm	Min Loop Tensile Strength N (Lbs)	Package Quantity Pcs	Apprx.wt per bag Kgs	Suggested Tools
BT4BUNC	4.6 x 120	4.6	120	0.25	29	600 (135)	100	0.22	 BTCT007
BT4BUNC	4.6 x 150	4.6	150	0.25	37	600 (135)	100	0.25	
BT4BUNC	4.6 x 200	4.6	200	0.25	52	600 (135)	100	0.30	
BT4BUNC	4.6 x 250	4.6	250	0.25	67	600 (135)	100	0.35	
BT4BUNC	4.6 x 300	4.6	300	0.25	83	600 (135)	100	0.40	
BT4BUNC	4.6 x 350	4.6	350	0.25	99	600 (135)	100	0.45	
BT4BUNC	4.6 x 400	4.6	400	0.25	115	600 (135)	100	0.50	
BT4BUNC	4.6 x 450	4.6	450	0.25	131	600 (135)	100	0.55	
BT4BUNC	4.6 x 500	4.6	500	0.25	147	600 (135)	100	0.60	
BT4BUNC	7.9 x 150	7.9	150	0.25	37	900 (202)	100	0.40	 BTCT008
BT4BUNC	7.9 x 200	7.9	200	0.25	52	900 (202)	100	0.48	
BT4BUNC	7.9 x 250	7.9	250	0.25	67	900 (202)	100	0.56	
BT4BUNC	7.9 x 300	7.9	300	0.25	83	900 (202)	100	0.65	
BT4BUNC	7.9 x 350	7.9	350	0.25	99	900 (202)	100	0.73	
BT4BUNC	7.9 x 400	7.9	400	0.25	115	900 (202)	100	0.81	
BT4BUNC	7.9 x 450	7.9	450	0.25	131	900 (202)	100	0.90	
BT4BUNC	7.9 x 500	7.9	500	0.25	147	900 (202)	100	1.00	
BT4BUNC	7.9 x 550	7.9	550	0.25	163	900 (202)	100	1.10	
BT4BUNC	7.9 x 600	7.9	600	0.25	179	900 (202)	100	1.20	
BT4BUNC	7.9 x 700	7.9	700	0.25	210	900 (202)	100	1.40	 BTST009
BT4BUNC	7.9 x 800	7.9	800	0.25	242	900 (202)	100	1.60	
BT4BUNC	7.9 x 900	7.9	900	0.25	273	900 (202)	100	1.80	
BT4BUNC	12 x 300	12	300	0.3	83	1600 (360)	50	0.65	
BT4BUNC	12 x 350	12	350	0.3	99	1600 (360)	50	0.75	
BT4BUNC	12 x 400	12	400	0.3	115	1600 (360)	50	0.85	
BT4BUNC	12 x 450	12	450	0.3	131	1600 (360)	50	0.95	
BT4BUNC	12 x 500	12	500	0.3	147	1600 (360)	50	1.05	
BT4BUNC	12 x 550	12	550	0.3	163	1600 (360)	50	1.15	
BT4BUNC	12 x 600	12	600	0.3	179	1600 (360)	50	1.25	
BT4BUNC	12 x 700	12	700	0.3	210	1600 (360)	50	1.45	
BT4BUNC	12 x 800	12	800	0.3	242	1600 (360)	50	1.65	
BT4BUNC	12 x 900	12	900	0.3	273	1600 (360)	50	1.85	
BT4BUNC	15 x 300	15	300	0.3	83	2040 (459)	25	0.72	
BT4BUNC	15 x 350	15	350	0.3	99	2040 (459)	25	0.85	
BT4BUNC	15 x 400	15	400	0.3	115	2040 (459)	25	0.98	
BT4BUNC	15 x 450	15	450	0.3	131	2040 (459)	25	1.12	
BT4BUNC	15 x 500	15	500	0.3	147	2040 (459)	25	1.25	
BT4BUNC	15 x 550	15	550	0.3	163	2040 (459)	25	1.39	
BT4BUNC	15 x 600	15	600	0.3	179	2040 (459)	25	1.55	
BT4BUNC	15 x 700	15	700	0.3	210	2040 (459)	25	1.85	
BT4BUNC	15 x 800	15	800	0.3	242	2040 (459)	25	2.15	
BT4BUNC	15 x 900	15	900	0.3	273	2040 (459)	25	2.50	
BT4BUNC	15 x 1000	15	1000	0.3	305	2040 (459)	25	2.85	



ROLLER BALL LOCK TIES

**Stainless Steel Grade 316,
Uncoated**

Temperature range : (-) 80°C to 538°C
Flammability : Fire Proof
Features : UV Resistant, Weather Proof,
Indoor / Outdoor use



B-Tec Part Code	Type	Width mm	Length mm	Thickness mm	Max Bundle Dia mm	Min Loop Tensile Strength N (Lbs)	Package Quantity Pcs	Apprx.wt per bag Kgs	Suggested Tools
BT6BUNC	4.6 x 120	4.6	120	0.25	29	600 (135)	100	0.22	 BTCT007
BT6BUNC	4.6 x 150	4.6	150	0.25	37	600 (135)	100	0.25	
BT6BUNC	4.6 x 200	4.6	200	0.25	52	600 (135)	100	0.30	
BT6BUNC	4.6 x 250	4.6	250	0.25	67	600 (135)	100	0.35	
BT6BUNC	4.6 x 300	4.6	300	0.25	83	600 (135)	100	0.40	
BT6BUNC	4.6 x 350	4.6	350	0.25	99	600 (135)	100	0.45	
BT6BUNC	4.6 x 400	4.6	400	0.25	115	600 (135)	100	0.50	
BT6BUNC	4.6 x 450	4.6	450	0.25	131	600 (135)	100	0.55	
BT6BUNC	4.6 x 500	4.6	500	0.25	147	600 (135)	100	0.60	
BT6BUNC	7.9 x 150	7.9	150	0.25	37	900 (202)	100	0.40	
BT6BUNC	7.9 x 200	7.9	200	0.25	52	900 (202)	100	0.48	
BT6BUNC	7.9 x 250	7.9	250	0.25	67	900 (202)	100	0.56	
BT6BUNC	7.9 x 300	7.9	300	0.25	83	900 (202)	100	0.65	
BT6BUNC	7.9 x 350	7.9	350	0.25	99	900 (202)	100	0.73	
BT6BUNC	7.9 x 400	7.9	400	0.25	115	900 (202)	100	0.81	
BT6BUNC	7.9 x 450	7.9	450	0.25	131	900 (202)	100	0.90	
BT6BUNC	7.9 x 500	7.9	500	0.25	147	900 (202)	100	1.00	
BT6BUNC	7.9 x 550	7.9	550	0.25	163	900 (202)	100	1.10	
BT6BUNC	7.9 x 600	7.9	600	0.25	179	900 (202)	100	1.20	
BT6BUNC	7.9 x 700	7.9	700	0.25	210	900 (202)	100	1.40	
BT6BUNC	7.9 x 800	7.9	800	0.25	242	900 (202)	100	1.60	 BTCT008
BT6BUNC	7.9 x 900	7.9	900	0.25	273	900 (202)	100	1.80	
BT6BUNC	12 x 300	12	300	0.35	83	1600 (360)	50	0.65	
BT6BUNC	12 x 350	12	350	0.35	99	1600 (360)	50	0.75	
BT6BUNC	12 x 400	12	400	0.35	115	1600 (360)	50	0.85	
BT6BUNC	12 x 450	12	450	0.35	131	1600 (360)	50	0.95	
BT6BUNC	12 x 500	12	500	0.35	147	1600 (360)	50	1.05	
BT6BUNC	12 x 550	12	550	0.35	163	1600 (360)	50	1.15	
BT6BUNC	12 x 600	12	600	0.35	179	1600 (360)	50	1.25	
BT6BUNC	12 x 700	12	700	0.35	210	1600 (360)	50	1.45	
BT6BUNC	12 x 800	12	800	0.35	242	1600 (360)	50	1.65	
BT6BUNC	12 x 900	12	900	0.35	273	1600 (360)	50	1.85	
BT6BUNC	15 x 300	15	300	0.35	83	2040 (459)	25	0.72	
BT6BUNC	15 x 350	15	350	0.35	99	2040 (459)	25	0.85	
BT6BUNC	15 x 400	15	400	0.35	115	2040 (459)	25	0.98	
BT6BUNC	15 x 450	15	450	0.35	131	2040 (459)	25	1.12	
BT6BUNC	15 x 500	15	500	0.35	147	2040 (459)	25	1.25	
BT6BUNC	15 x 550	15	550	0.35	163	2040 (459)	25	1.39	
BT6BUNC	15 x 600	15	600	0.35	179	2040 (459)	25	1.55	 BTST009
BT6BUNC	15 x 700	15	700	0.35	210	2040 (459)	25	1.85	
BT6BUNC	15 x 800	15	800	0.35	242	2040 (459)	25	2.15	
BT6BUNC	15 x 900	15	900	0.35	273	2040 (459)	25	2.50	
BT6BUNC	15 x 1000	15	1000	0.35	305	2040 (459)	25	2.85	
BT6BUNC									
BT6BUNC									
BT6BUNC									



ROLLER BALL LOCK TIES

**Stainless Steel Grade 304,
Polyester Fully coated**

Temperature range : (-) 40° C to 150° C
Flammability : Fire Retardant, Non Toxic,
Zero Halogen, Low Smoke
Features : UV Resistant, Weather Proof,
Indoor / Outdoor use



B-Tec Part Code	Type	Width mm	Length mm	Thickness mm	Max Bundle Dia mm	Min Loop Tensile Strength N (Lbs)	Package Quantity Pcs	Apprx.wt per bag Kgs	Suggested Tools
BT4BEFC	4.6 x 120	4.6	120	0.25	29	580 (130)	100	0.22	 BTCT007
BT4BEFC	4.6 x 150	4.6	150	0.25	37	580 (130)	100	0.25	
BT4BEFC	4.6 x 200	4.6	200	0.25	52	580 (130)	100	0.30	
BT4BEFC	4.6 x 250	4.6	250	0.25	67	580 (130)	100	0.35	
BT4BEFC	4.6 x 300	4.6	300	0.25	83	580 (130)	100	0.40	
BT4BEFC	4.6 x 350	4.6	350	0.25	99	580 (130)	100	0.45	
BT4BEFC	4.6 x 400	4.6	400	0.25	115	580 (130)	100	0.50	
BT4BEFC	4.6 x 450	4.6	450	0.25	131	580 (130)	100	0.55	
BT4BEFC	4.6 x 500	4.6	500	0.25	147	580 (130)	100	0.60	
BT4BEFC	7.9 x 150	7.9	150	0.25	37	860 (193)	100	0.40	 BTCT008
BT4BEFC	7.9 x 200	7.9	200	0.25	52	860 (193)	100	0.48	
BT4BEFC	7.9 x 250	7.9	250	0.25	67	860 (193)	100	0.56	
BT4BEFC	7.9 x 300	7.9	300	0.25	83	860 (193)	100	0.65	
BT4BEFC	7.9 x 350	7.9	350	0.25	99	860 (193)	100	0.73	
BT4BEFC	7.9 x 400	7.9	400	0.25	115	860 (193)	100	0.81	
BT4BEFC	7.9 x 450	7.9	450	0.25	131	860 (193)	100	0.90	
BT4BEFC	7.9 x 500	7.9	500	0.25	147	860 (193)	100	1.00	
BT4BEFC	7.9 x 550	7.9	550	0.25	163	860 (193)	100	1.10	
BT4BEFC	7.9 x 600	7.9	600	0.25	179	860 (193)	100	1.20	 BTST009
BT4BEFC	7.9 x 700	7.9	700	0.25	210	860 (193)	100	1.40	
BT4BEFC	7.9 x 800	7.9	800	0.25	242	860 (193)	100	1.60	
BT4BEFC	7.9 x 900	7.9	900	0.25	273	860 (193)	100	1.80	
BT4BEFC	12 x 300	12	300	0.3	83	1540 (346)	50	0.65	
BT4BEFC	12 x 350	12	350	0.3	99	1540 (346)	50	0.75	
BT4BEFC	12 x 400	12	400	0.3	115	1540 (346)	50	0.85	
BT4BEFC	12 x 450	12	450	0.3	131	1540 (346)	50	0.95	
BT4BEFC	12 x 500	12	500	0.3	147	1540 (346)	50	1.05	
BT4BEFC	12 x 550	12	550	0.3	163	1540 (346)	50	1.15	
BT4BEFC	12 x 600	12	600	0.3	179	1540 (346)	50	1.25	
BT4BEFC	12 x 700	12	700	0.3	210	1540 (346)	50	1.45	
BT4BEFC	12 x 800	12	800	0.3	242	1540 (346)	50	1.65	
BT4BEFC	12 x 900	12	900	0.3	273	1540 (346)	50	1.85	
BT4BEFC	15 x 300	15	300	0.35	83	2000 (450)	25	0.72	
BT4BEFC	15 x 350	15	350	0.35	99	2000 (450)	25	0.85	
BT4BEFC	15 x 400	15	400	0.35	115	2000 (450)	25	0.98	
BT4BEFC	15 x 450	15	450	0.35	131	2000 (450)	25	1.12	
BT4BEFC	15 x 500	15	500	0.35	147	2000 (450)	25	1.25	
BT4BEFC	15 x 550	15	550	0.35	163	2000 (450)	25	1.39	
BT4BEFC	15 x 600	15	600	0.35	179	2000 (450)	25	1.55	
BT4BEFC	15 x 700	15	700	0.35	210	2000 (450)	25	1.85	
BT4BEFC	15 x 800	15	800	0.35	242	2000 (450)	25	2.15	
BT4BEFC	15 x 900	15	900	0.35	273	2000 (450)	25	2.50	
BT4BEFC	15 x 1000	15	1000	0.35	305	2000 (450)	25	2.85	



ROLLER BALL LOCK TIES

**Stainless Steel Grade 316,
Polyester Fully coated**

Temperature range : (-) 40° C to 150° C

Flammability : Fire Retardant, Non Toxic,
Zero Halogen, Low Smoke

Features : UV Resistant, Weather Proof,
Indoor / Outdoor use



B-Tec Part Code	Type	Width mm	Length mm	Thickness mm	Max Bundle Dia mm	Min Loop Tensile Strength N (Lbs)	Package Quantity Pcs	Apprx.wt per bag Kgs	Suggested Tools
BT6BEFC	4.6 x 120	4.6	120	0.25	29	580 (130)	100	0.22	 BTCT007
BT6BEFC	4.6 x 150	4.6	150	0.25	37	580 (130)	100	0.25	
BT6BEFC	4.6 x 200	4.6	200	0.25	52	580 (130)	100	0.30	
BT6BEFC	4.6 x 250	4.6	250	0.25	67	580 (130)	100	0.35	
BT6BEFC	4.6 x 300	4.6	300	0.25	83	580 (130)	100	0.40	
BT6BEFC	4.6 x 350	4.6	350	0.25	99	580 (130)	100	0.45	
BT6BEFC	4.6 x 400	4.6	400	0.25	115	580 (130)	100	0.50	
BT6BEFC	4.6 x 450	4.6	450	0.25	131	580 (130)	100	0.55	
BT6BEFC	4.6 x 500	4.6	500	0.25	147	580 (130)	100	0.60	
BT6BEFC	7.9 x 150	7.9	150	0.25	37	860 (193)	100	0.40	
BT6BEFC	7.9 x 200	7.9	200	0.25	52	860 (193)	100	0.48	
BT6BEFC	7.9 x 250	7.9	250	0.25	67	860 (193)	100	0.56	
BT6BEFC	7.9 x 300	7.9	300	0.25	83	860 (193)	100	0.65	
BT6BEFC	7.9 x 350	7.9	350	0.25	99	860 (193)	100	0.73	
BT6BEFC	7.9 x 400	7.9	400	0.25	115	860 (193)	100	0.81	
BT6BEFC	7.9 x 450	7.9	450	0.25	131	860 (193)	100	0.90	
BT6BEFC	7.9 x 500	7.9	500	0.25	147	860 (193)	100	1.00	
BT6BEFC	7.9 x 550	7.9	550	0.25	163	860 (193)	100	1.10	
BT6BEFC	7.9 x 600	7.9	600	0.25	179	860 (193)	100	1.20	
BT6BEFC	7.9 x 700	7.9	700	0.25	210	860 (193)	100	1.40	
BT6BEFC	7.9 x 800	7.9	800	0.25	242	860 (193)	100	1.60	 BTCT008
BT6BEFC	7.9 x 900	7.9	900	0.25	273	860 (193)	100	1.80	
BT6BEFC	12 x 300	12	300	0.3	83	1540 (346)	50	0.65	
BT6BEFC	12 x 350	12	350	0.3	99	1540 (346)	50	0.75	
BT6BEFC	12 x 400	12	400	0.3	115	1540 (346)	50	0.85	
BT6BEFC	12 x 450	12	450	0.3	131	1540 (346)	50	0.95	
BT6BEFC	12 x 500	12	500	0.3	147	1540 (346)	50	1.05	
BT6BEFC	12 x 550	12	550	0.3	163	1540 (346)	50	1.15	
BT6BEFC	12 x 600	12	600	0.3	179	1540 (346)	50	1.25	
BT6BEFC	12 x 700	12	700	0.3	210	1540 (346)	50	1.45	
BT6BEFC	12 x 800	12	800	0.3	242	1540 (346)	50	1.65	
BT6BEFC	12 x 900	12	900	0.3	273	1540 (346)	50	1.85	
BT6BEFC	15 x 300	15	300	0.35	83	2000 (450)	25	0.72	
BT6BEFC	15 x 350	15	350	0.35	99	2000 (450)	25	0.85	
BT6BEFC	15 x 400	15	400	0.35	115	2000 (450)	25	0.98	
BT6BEFC	15 x 450	15	450	0.35	131	2000 (450)	25	1.12	
BT6BEFC	15 x 500	15	500	0.35	147	2000 (450)	25	1.25	
BT6BEFC	15 x 550	15	550	0.35	163	2000 (450)	25	1.39	 BTST009
BT6BEFC	15 x 600	15	600	0.35	179	2000 (450)	25	1.55	
BT6BEFC	15 x 700	15	700	0.35	210	2000 (450)	25	1.85	
BT6BEFC	15 x 800	15	800	0.35	242	2000 (450)	25	2.15	
BT6BEFC	15 x 900	15	900	0.35	273	2000 (450)	25	2.50	
BT6BEFC	15 x 1000	15	1000	0.35	305	2000 (450)	25	2.85	



STAINLESS STEEL CABLE TIES

Stainless Steel Multi Lock Ties

These are self - locking Stainless Steel Cable Ties with a Positive Locking System which are designed for an Extra Strong, Vibration Proof, Durable, Corrosion Resistant Bundling of Cables.

- The locking mechanism in multi lock self locking ties is a positive engagement of multi teeth on the head to the slots on the band
- Loop Tensile Strength is upto 2000 N (450 lbs)
- 7 mm & 12 mm width and in various lengths are available
- Available in Non Corrosive, Non magnetic High Grade SS 316
- Polyester Coated Ties available
- Uncoated Ties Temperature ranges from (-)80°C to 538°C and Polyester Coated Ties Temperature ranges from (-)40°C to 150°C (Polyester)
- Polyester Coating is Halogen Free, Low Smoke, Non-toxic, Flame Retardant and UV Resistant

Applications : Cable bundling to cable ways, Bundling of Cables together, Tying cables / hoses to poles, light duty clamping etc.

Application suggestions : Always use a proper Tool for tensioning and cutting the Multi Lock Ties. Excellent for applications where heavy vibrations or thermal cycles expected.



Application of Multi Lock Ties



MULTI LOCK TIES

Stainless Steel Grade 316, Uncoated	Temperature range	: (-) 80°C to 538°C
	Flammability	: Fire Proof
	Features	: UV Resistant, Weather Proof, Indoor / Outdoor use



B-Tec Part Code	Type	Width mm	Length mm	Thickness mm	Max Bundle Dia mm	Min Loop Tensile Strength N (lbs)	Package Quantity Pcs	Apprx.wt per bag Kgs	Suggested Tools
BT6MUNC	7 X 150	7	150	0.3	37	1110 (250)	100	0.27	 BTCT 007  BTCT 020
BT6MUNC	7 X 225	7	225	0.3	58	1110 (250)	100	0.43	
BT6MUNC	7 X 300	7	300	0.3	83	1110 (250)	100	0.55	
BT6MUNC	7 X 450	7	450	0.3	131	1110 (250)	100	0.75	
BT6MUNC	7 X 610	7	610	0.3	179	1110 (250)	100	1.05	
BT6MUNC	12 x 150	12	150	0.3	37	2000(450)	100	1.10	
BT6MUNC	12 x 225	12	225	0.3	58	2000(450)	100	0.50	
BT6MUNC	12 x 300	12	300	0.3	83	2000(450)	100	0.80	
BT6MUNC	12 x 450	12	450	0.3	131	2000(450)	100	1.00	
BT6MUNC	12 x 610	12	610	0.3	179	2000(450)	100	1.35	
BT6MUNC	12 x 760	12	760	0.3	220	2000(450)	100	1.9	

Stainless Steel Grade 316, Polyester coated	Temperature range	: (-) 40° C to 150°C
	Flammability	: Fire Retardant, Non Toxic, Zero Halogen, Low Smoke
	Features	: UV Resistant, Weather Proof, Indoor / Outdoor use



B-Tec Part Code	Type	Width mm	Length mm	Thickness mm	Max Bundle Dia mm	Min Loop Tensile Strength N (lbs)	Package Quantity Pcs	Apprx.wt per bag Kgs	Suggested Tools
BT6MEFC	7 X 150	7	150	0.3	37	1110 (250)	100	0.27	 BTCT 007  BTCT 020
BT6MEFC	7 X 225	7	225	0.3	58	1110 (250)	100	0.43	
BT6MEFC	7 X 300	7	300	0.3	83	1110 (250)	100	0.55	
BT6MEFC	7 X 450	7	450	0.3	131	1110 (250)	100	0.75	
BT6MEFC	7 X 610	7	610	0.3	179	1110 (250)	100	1.05	
BT6MEFC	12 x 150	12	150	0.35	37	2000(450)	100	1.10	
BT6MEFC	12 x 225	12	225	0.35	58	2000(450)	100	0.50	
BT6MEFC	12 x 300	12	300	0.35	83	2000(450)	100	0.80	
BT6MEFC	12 x 450	12	450	0.35	131	2000(450)	100	1.00	
BT6MEFC	12 x 610	12	610	0.35	179	2000(450)	100	1.35	
BT6MEFC	12 x 760	12	760	0.35	220	2000(450)	100	1.9	



STAINLESS STEEL CABLE TIES


Stainless Steel Releasable Ties

Releasable / Re-usable Stainless Steel Ties are designed for strong, durable, corrosion resistant, vibration resistant bundling of cables. The bundling can be done by tool or by hand.

- The Positive locking mechanism that can be opened and re-lock
- Two sizes available, 6.35 mm wide and 9.5 mm wide length upto 1200 mm
- Loop Tensile Strength upto 1900 N (425 lbs.)
- Available in Stainless Steel Grade 316
- Epoxy / Polyester coated Ties available
- Uncoated Ties Temperature ranges from (-)80°C to 538°C and Polyester Coated Ties Temperature ranges from (-)40°C to 150°C
- Epoxy / Polyester Coating is Non Toxic, Flame Retardant, Halogen Free, Low Smoke and UV Resistant

Applications : Cable bundling to cable ways, Bundling of Cables together, Light Duty Clamping etc. Reusable. It can be used in double wrap for special strength applications.

Application suggestion : These are mostly simple to use SS ties. Can be used in area with heavy vibration or temperature cycles. Do not cut the tail unless it is necessary, keep in bent so that the ties can be re-used.

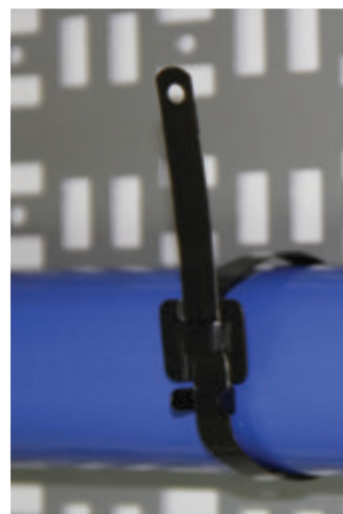

Releasable Ties

RELEASABLE TIES

Stainless Steel Grade 316, Polyester Coated

Temperature range : (-) 40° C to 150° C

Flammability : Fire Retardant, Non Toxic,
Zero Halogen, Low Smoke

Features : UV Resistant,
Weather Proof Indoor / Outdoor use



B-Tec Part Code	Type	Width mm	Length mm	Thickness mm	Max Bundle Dia mm	Min Loop Tensile Strength N (lbs)	Package Quantity Pcs	Apprx.wt per bag Kgs	Suggested Tools
BT6REFC	6.35 X 150	6.35	150	0.38	38	1200 (270)	100	0.65	 BTST 009
BT6REFC	6.35 X 225	6.35	225	0.38	62	1200 (270)	100	0.85	
BT6REFC	6.35 X 300	6.35	300	0.38	85	1200 (270)	100	1.00	
BT6REFC	6.35 X 360	6.35	360	0.38	106	1200 (270)	100	1.20	
BT6REFC	6.35 X 450	6.35	450	0.38	135	1200 (270)	100	1.45	
BT6REFC	6.35 X 600	6.35	600	0.38	180	1200 (270)	100	1.80	
BT6REFC	9.5 X 150	9.50	150	0.38	38	1900 (425)	100	0.85	
BT6REFC	9.5 X 225	9.50	225	0.38	62	1900 (425)	100	1.15	
BT6REFC	9.5 X 300	9.50	300	0.38	85	1900 (425)	100	1.50	
BT6REFC	9.5 X 360	9.50	360	0.38	106	1900 (425)	100	1.80	
BT6REFC	9.5 X 450	9.50	450	0.38	135	1900 (425)	100	2.30	 BTCT 020
BT6REFC	9.5 X 600	9.50	600	0.38	180	1900 (425)	100	3.15	
BT6REFC	9.5 X 760	9.50	760	0.38	230	1900 (425)	100	3.30	

Stainless Steel Grade 316, Uncoated

Temperature range : (-) 80°C to 538°C

Flammability : Fire Proof

Features : UV Resistant, Weather Proof



B-Tec part code	Type	Width mm	Length mm	Thickness mm	Max Bundle Dia mm	Min Loop Tensile Strength N (lbs)	Package Quantity Pcs	Apprx.wt per bag Kgs	Suggested Tools
BT6RUNC	6.35 X 150	6.35	150	0.38	38	1200 (270)	100	0.65	 BTST 009
BT6RUNC	6.35 X 225	6.35	225	0.38	62	1200 (270)	100	0.85	
BT6RUNC	6.35 X 300	6.35	300	0.38	85	1200 (270)	100	1.00	
BT6RUNC	6.35 X 360	6.35	360	0.38	106	1200 (270)	100	1.20	
BT6RUNC	6.35 X 450	6.35	450	0.38	135	1200 (270)	100	1.45	
BT6RUNC	6.35 X 600	6.35	600	0.38	180	1200 (270)	100	1.80	
BT6RUNC	9.5 X 150	9.50	150	0.38	38	1900 (425)	100	0.85	
BT6RUNC	9.5 X 225	9.50	225	0.38	62	1900 (425)	100	1.15	
BT6RUNC	9.5 X 300	9.50	300	0.38	85	1900 (425)	100	1.50	
BT6RUNC	9.5 X 360	9.50	360	0.38	106	1900 (425)	100	1.80	
BT6RUNC	9.5 X 450	9.50	450	0.38	135	1900 (425)	100	2.30	 BTCT 020
BT6RUNC	9.5 X 600	9.50	600	0.38	180	1900 (425)	100	3.15	
BT6RUNC	9.5 X 760	9.50	760	0.38	230	1900 (425)	100	3.30	